
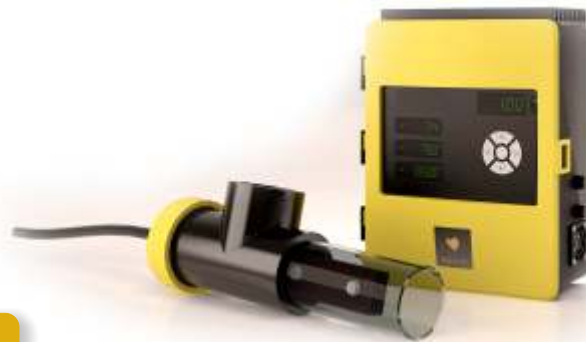


QUICK INSTALATION GUIDE

HIDROLIFE

sugar.valley

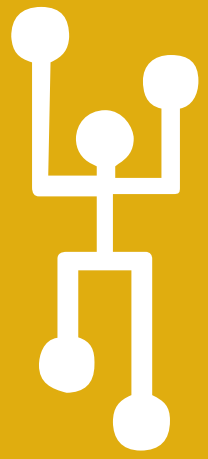

1 DESCRIPTION

The salt water electrolysis produces Chlorine on the bases of salt water of low salinity (approximately 5g Salt per litre). As the swimming pool water containing the salt flows through the electrolysis cell, the salt is converted to Sodium-hypochloride (liquid chlorine). Organic mater present in the water is oxidised and eliminated by the chlorine. The Sodium-hypo-chloride reconverts into salt on its way back to the swimming pool.

Electronic unit

- 2 Electrolysis
- 3 RCA flow detector
- 4 pH probe
- 5 Redox probe
- 6 Mains connection 220v.
- 7 3.15A fuse
- 8 250 mA fuse
- 9 On-off switch
- 10 Air vent
- 11 Acid pump connection



Cell

- 1 Electrolysis cell
- 2 RCA flow detector
- 3 Cell connector
- 4 Flow/gas detector
- 5 Cell housing



Optional extras


pH Probe

- 1 Probe
- 2 Probe casing
- 3 Connection housing



Redox Probe

- 1 Probe
- 2 Probe casing
- 3 Connection housing



Conductividad Probe

- 1 Probe
- 2 Probe casing
- 3 Connection housing



2 INSTALLATION

Electrical consumption

	Maximum consumption	Recommended protection	grCl ₂ /h
SAL16	180W	10A	16
SAL22	205W	10A	22
SAL33	228W	16A	33
SAL50	600W	16A	50
SAL85	1020W	25A	85
SAL125	1440W	25A	125
SAL175	2040W	25A	175
SAL250	2880W	25A	250

TITANIUM CELL connection overheating




Ensure all electrical connections are firmly fixed to avoid false contacts and subsequent overheating of system components (Especially concerning the electrolysis cell with usage above 33A).

HIDROLIFE synchronized with FILTRATION



Ensure the electrolysis unit is synchronized with the pool filtration and stops functioning when water circulation has stopped.

System installation diagram

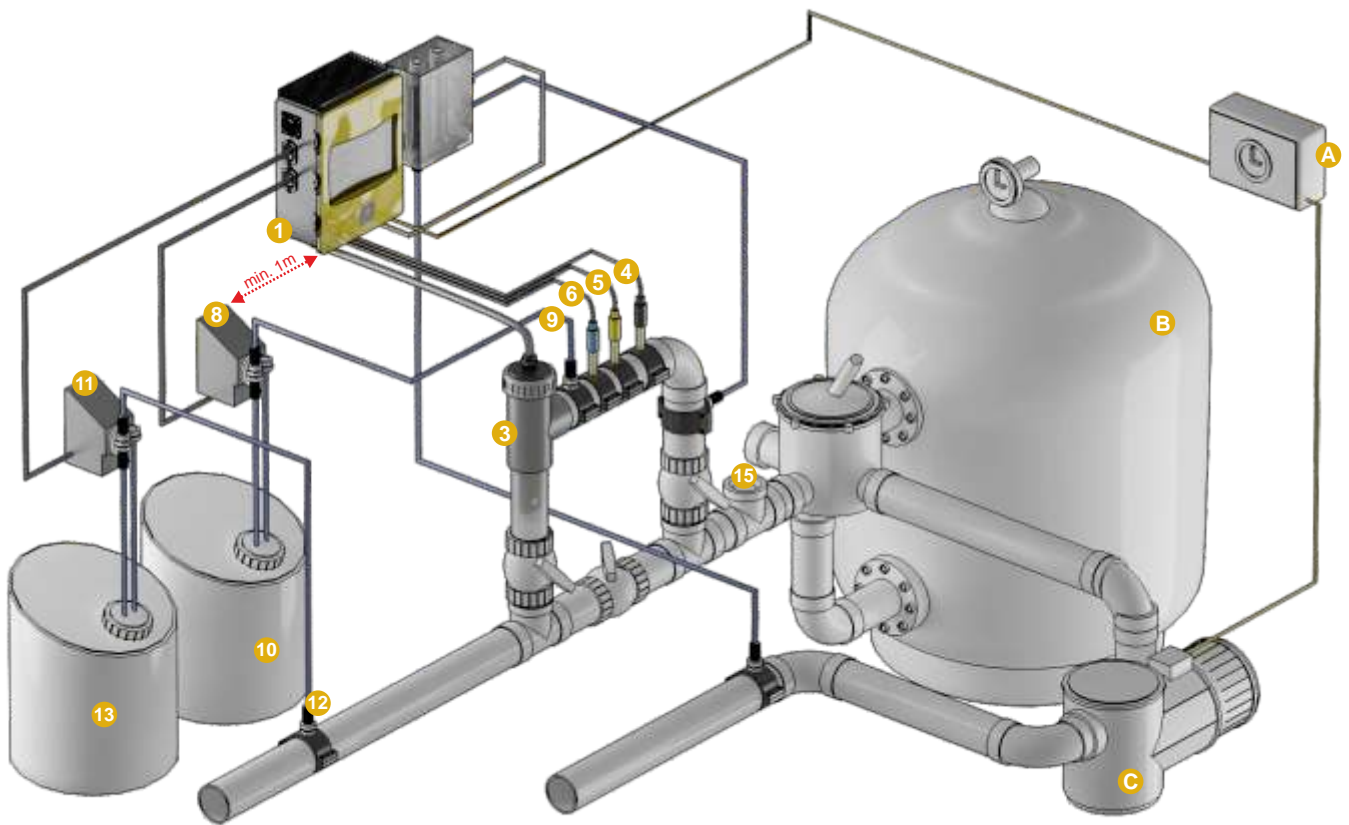

- A** Filtration pump timer
- B** Sand filter
- C** Recirculation pump

- 1** Electrical housing
- 3** Electrolysis cell (always in vertical position)
- 4** pH probe (Optional, for models with pH control)
- 5** Redox probe (Optional, for models with redox control)
- 6** Conductivity probe (Optional, for models with conductivity control)

- 8** Acid pump (Optional, for models with PH control)
- 9** Acid injector (Optional, for models with PH control)
- 10** Hydrochloric acid container (optional, for models with PH control, not supplied with unit)
- 11** Chlorine pump (Optional, for models with redox or free chlorine control + auxiliary chlorine dosage)
- 12** Chlorine injector (Optional, for models with redox or free chlorine control)
- 13** Chlorine container (Optional, for models with redox or free chlorine control, not supplied with unit)
- 15** Other pool equipment (pool heating, heat exchanger, etc.)

3 INITIAL ADJUSTMENTS

Water adjustments

1. Adjust the alkalinity between 90 and 110 ppm.
 2. Adjust the PH between 7,2 and 7,4
 3. Adjust the chlorine between 1 and 1,5 ppm.
- SHOULD the water be supplied from a well: shock chlorinate with Tricloroisocyanuric acid (2Kg./50m3 of water)

Adding Salt to the Water

Add 5 to 6 Gramm Salt (without Yod) for each litre of water in your swimming pool (5 to 6 kg NaCl per m3 Water). Open the bottom valve of your swimming pool and add the Salt directly to your swimming pool water. Let the circulation pump run during the first 24 hours your Hidrolife system is working in order to dissolve the Salt completely. Your hidrolife System will operate without any problems with salt concentrations from 2,5g to 50g Salt per litre.

IN POOLS WHICH RECEIVE LARGE AMOUNTS OF STRONG SUNLIGHT 40gr/m3 OF STABILYSER (Isocyanuric acid) MUST BE ADDED

The Hidrolife system can be used in SPA 's to produce Bromine: Add 0,12 Kg of Sodium Bromine for each m3 of Water (in conjunction with the normal salt concentration - see above). Hidrolife/Bionet will generate enough Bromine to purify your spa.

4 START UP

Electronic housing display



Start up

- LO** : **Conductivity/Cell life**
 Low conductivity (See section 3)
 Titanium cell incrusted (See cleaning process in section 5)
 Cell surface corroded (See section 7)
- FL1** : **Insufficient FLOW or cell disconnected**
 Production halted due to lack of flow, or gas in the titanium cell detector.
- OFF** : **ONLY SYSTEMS WITH REDOX OR FREE CHLORINE**
 The system has automatically stopped as Redox levels are above the chosen values (See section 5)

- FL2** : **ONLY SYSTEMS WITH FREE CHLORINE CONTROL (ppm's)**
 INSUFFICIENT FLOW in the CHLORINE detector. The rotary sensor detects insufficient flow. CHECK the rotameter pendel – and solve the system's hydraulic problem (If there is a preceding filter this must be cleaned).
- 0** : **Time delay**
 Period of non-production of oxidant while system changes polarity (0-120 sec.)
- AL** : **ALARM**
 Excessive increase or decrease in parameters (+/- 15% from the selected parameters).
 CHECK LEVELS IN ACID/BASE CONTAINERS
 CHECK PROBE CALIBRATION

5

SYSTEMS WITH REDOX CONTROL

The Redox level advises us of the potential oxidization or reduction level and is used to determine the level of water sterilization. The parameters or Set Points are the minimum/maximum accepted REDOX levels before the titanium cell is connected/disconnected.

Adjusting the ideal REDOX level (set point) is the last step in the HIDROLIFE start up sequence. To find the optimum REDOX level for your pool follow these steps:

1. Connect the pool filtration system (The salt in the pool must be adequately dissolved)
2. Add chlorine to the pool till a level of 1-1,5ppm. Is achieved (Approx. 1-1,5gr/m³ of water). PH levels should be between 7,2 and 7,5.
3. After 30 min. test the free chlorine levels in the pool (DPD1 manual test kit) If the free chlorine level is between 0,8-1,0ppm. Look at the REDOX screen and memorize this level as the set point to CONNECT/DISCONNECT the hydrolysis cell (To memorize the set point see section 8)
4. The next day check free chlorine levels (manual DPD1 test kit) and REDOX, Raise/lower set point if necessary

6

MAINTENANCE

Initial days of maintenance

During the first 10-15 days your pool system will require more attention and the following care:

1 CHECK THE PH REMAINS BETWEEN THE IDEAL LEVELS (7,2-7,4). If the PH is unusually unstable AND USES A LOT OF ACID check the alkalinity (Recommended levels between 80 and 125ppm.).

2 The pool must be vacuumed and the skimmers cleaned whenever necessary to ensure perfect water conditions.

REMEMBER

that the Sugar Valley system requires a certain amount of time to adapt to your swimming pool and will require additional chemicals during the first 3-5 days.

Titanium cell maintenance

Cleaning the Titanium cell: Maintenance of the disinfection system (Electrolysis) consists of cleaning the cell or electrode every 2-3 months should it appear necessary (carry out a visual inspection) To clean the electrode:

- Remove the cell from its support (after turning off the filtration system and closing off the necessary valves).
- Place the electrode for no more than 10 min. in 15% HYDROCHLORIC ACID (salfumant). 1,5l of acid for each 8,5l of water.
- Once the incrustations have softened remove with a hose to complete cleaning the cell.

USE NO METALIC OR SHARP OBJECTS TO REMOVE INCRUSTATIONS. Scratching the edges or surface of the cell will make it vulnerable to chemicals, deteriorate the cell and annul the guarantee.

Fortnightly checks

FREE chlorine : 1.0 – 2.0 PPM
pH : 7,1 – 7,5

Monthly checks

TOTAL alkalinity (TAC) : 80-120 ppm
Salt concentration : 4.000 – 6.000 ppm
Cyanuric acid : 30-50 ppm
Titanium cell : Visual inspection to detect incrustations.

General maintenance

1-The pool must be vacuumed as usual and the skimmers emptied whenever necessary.

2-Filter backwashing: with Sugar Valley systems the filter requires only occasional backwashing; once every 20 days should be sufficient (providing the filter pressure does not exceed 1 bar, in which case a backwash may be necessary).

VERY IMPORTANT; Ensure that the system is turned off during filter backwashing.

3-ADDING NEW WATER: Always through the skimmers so that the new water passes through the Hidrolife before entering the pool. Remember to add the necessary salt: 6gr. per added litre of water.

4-In winter CHANGING THE POOL WATER IS NOT RECOMMENDABLE. We recommend that the system runs 2-3 times per week (2-3hrs. per day).

DOSAGE PUMPS: Check regularly to ensure that the container contains liquid to prevent the dosage pump running dry. The dosage pump requires maintenance (INSTRUCTIONS ON BOX).

PH PROBES/REDOX/CONDUCTIVITY: Probes must be cleaned whenever necessary (check every 5-6 months). To clean the probe insert in distilled water (Clear liquid). After each cleaning the probes must be calibrated.

Accessing user menu



Hold for 3 seconds to access/exit user menu



Displays

- 1 Electrolysis level
- 2 pH control
- 3 Redox/Free chlorine control
- 4 Conductivity control



User menu

CHLORINE PRODUCTION LEVEL **DISPLAY 1**To modify level RECOMMENDED LEVEL: MAXIMUM level according to model (see page2)

To confirm and change menu

pH SET POINTS **DISPLAY 2**

To LOWER pH - maximum water pH - CONTROLS THE ACID PUMP (optional equipment)

To modify parameters/maximum pH set point RECOMMENDED LEVEL BETWEEN 7,2 AND 7,5

To INCREASE pH - minimum water pH - CONTROLS THE BASE PUMP (optional equipment)

To modify parameters/minimum pH set point RECOMMENDED LEVEL: 6,8


pH PROBE CALIBRATION



Insert probe in pH 7 sample, wait till reading has stabilized



Clean probe in NEUTRAL. Insert probe in pH 10 sample and wait till reading is stable.

Calibration correct
Repeat calibration or change probeREDOX SET POINT **DISPLAY 3**

To modify parameters/Redox set point



To confirm and change menu



REDOX PROBE CALIBRATION



Insert probe into 465mv sample, wait till reading is stable

Calibration correct
Repeat calibration or change probeCONDUCTIVITY SET POINT **DISPLAY 4**

To modify parameters/conductivity set point



To confirm and change menu



CONDUCTIVITY PROBE CALIBRATION



Insert the probe in sample, wait until reading is stable.



Insert the probe in sample, wait until reading is stable.

Calibration correct
Repeat calibration or change probe.

To change menu and return to Ion menu.

8 TROUBLESHOOTING

Display blank

- *Check On/Off switch is illuminated
- *Check external 250mA fuse has not fused.
- *Check electric supply: 210-230V 50Hz
- *If problem persists contact TECHNICAL SERVICE

Excess chlorine in water

- *Lower electrolysis cell intensity.
- *If your system includes AUTOMATIC REDOX CONTROL check REDOX SETPOINT.
- *Check REDOX probe and calibrate if necessary.

Electrolysis does not reach maximum intensity

- *Check sodium bromide or common salt concentration in water.
- *Check cell status (may be incrustated or calcified).
- *Clean electrode following instructions in section 6.
- *Clean flow detector situated in the cell casing.
- *Check titanium cell is not worn (remember that the cell is guaranteed for 5000-6000 hours (approx. 2-3 years of Summer usage)- see troubleshooting for more information).

Titanium cell incrustated in less than 1 month

- *Very hard waters with a high pH and total alkalinity (Balance water adjusting pH and total alkalinity).
- *Check to ensure the system automatically changes polarity (LED's alternate every 300min. approx.).
- *CONSULT with our technical service to consider ACCELERATING THE polarity change (Auto-cleaning) WARNING: accelerating the polarity change decreases the cell life (5000 hours) proportionally.

Free chlorine levels don't reach 0,8ppm. First thing in the morning

- *INCREASE FILTRATION INTERVAL.
- *INCREASE electrolysis level.
- *Check levels of sodium bromide or common salt in the pool (6gr.NaCl/L).
- *Check level of isocyanuric acid in pool (30-50ppm.) ONLY if using COMMON SALT.
- *Check reactive agents in test kit are not TOO OLD.
- *Has the temperature or amount of users risen (see 3.1/3.2 see chapter "Water maintenance").
- *pH is above 7,8 and must be adjusted.

Electrolysis display shows LO

- *Water lacks conductivity (see section 3 "water preparation").
- *Check for incrustations on cell.
- *See troubleshooting "Hydrolysis does not reach maximum intensity".

White flakes in pool

- *This happens in excessively hard unbalanced waters.
- *Balance the water and check the cell, proceeding to clean it if necessary.

Electrolysis display shows FL

- *Check flow detector cable.
- *Clean incrustations of flow detector at top of cell casing.
- *Check system is free of air (Probe must be always submerged).

RUST on metallic components in pool

- *Metallic elements lack standardized earth connection. Contact an electrician to solve problem.
- *Rusted components are not stainless steel: minimum 304- recommended 316.

Polarity 1 reaches max. intensity but polarity 2 (Auto clean) does not

- *IF SALT LEVEL IS CORRECT (4-6kg./m³) cell is reaching end of life. As of this moment check intensity every 15-30 days
- *When polarity 2 does not reach 50% we recommend substituting cell for a new one if during the summer or maximum usage period. If this should happen in winter change before the next season (summer).

WARNING

Keep chemical levels in pool as instructed in this manual

CLEANING FILTER

Ensure HIDROLIFE is NOT RUNNING during backwash.

VERY IMPORTANT

REMEMBER that the system needs some time to adapt to your pool and you will have to increase chemical levels for the first 5 days.

EARTHING

All metallic components in the pool, such as lamps, ladders, heat exchangers, drains or similar elements within 3.00m. from pool (10feet) must be connected to an earth below 370hms.
WE RECOMMEND HEAT EXCHANGERS BE MADE OF TITANIUM.

SECURITY

To avoid accidents this product should not be handled by children unless supervised by an adult. Children should be supervised at all times when in or near a spa, pool or Jacuzzi.

HANDLING AND DOSING DANGEROUS CHEMICALS

Chemicals should be handled with extreme precaution. When preparing ACID, ALWAYS ADD THE ACID TO WATER, never add water to acid!!! VERY dangerous gasses may be produced.

